

ROPEWORK

Knoten, Stiche und Bünde



Ropework

Stopper knots

Stopper knots are used as a temporary method of stopping a rope from fraying or as a method of locking other knots which maybe prone to lossening.

The knots are the

Overhand Knot

Figure of Eight Knot



Overhand Knot



The Overhand Knot can be used to create a loop by doubling the rope by doubling the rope and then tying the knot

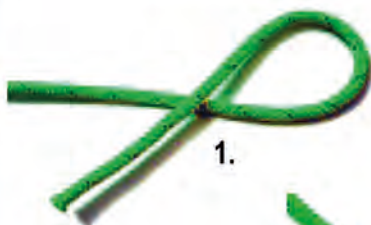


Figure of Eight

Reef Knot

1.



2.



3.



1.



2.



3.



Joining Knot

Joining knots are used for joining ropes of different thickness together. The Reef Knot and the Fisherman's Knot are used when joining ropes of the same thickness together whereas the Sheet Bend is better suited to ropes of different thickness.

The Joining Knots are

The Reef Knot

The Sheet Bend

The Fisherman's Knot

4.



The Reef Knot is used for tying bandages because when tied it lies flat.

Sheet bend

4.





5.



When tied with light and heavy lines it may be necessary to secure with a stopper knot or complete a number of turns as it Stage 3

Fisherman's Knot

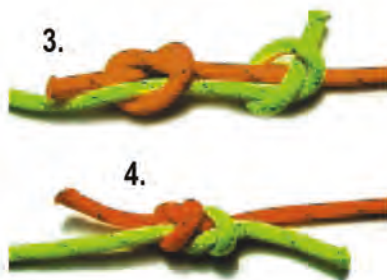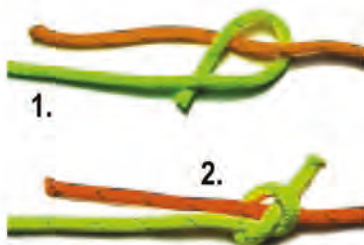

This knot is particularly useful for tying fishing line together

Fixing Knots

Fixing knots are those knots which are best suited to fixing a rope to a pole or object. The Clove Hitch and the Round Turn and two half hitches are the main knots used for fixing. The Marline Hitch is used for attaching the rungs to a rope ladder. When you need to drag a log or start a diagonal lashing you use the Timber Hitch. The Highwayman's Hitch is a fun knot which can be used

to fix a rope to a branch so as to climb up or down a tree. The beauty of this knot is that it can be removed from the ground by pulling on the slip loop. The fixing knots are:-


The Clove Hitch

The Round Turn and two half hitches


The Highwayman's Hitch

The Marline Hitch

Timber Hitch

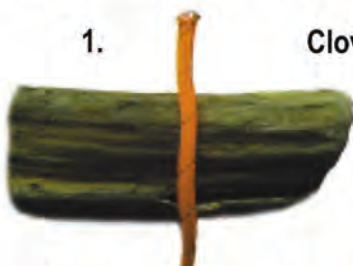

Clove Hitch

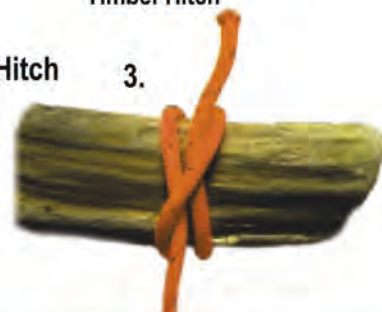

The Clove Hitch is normally used for fixing to a pole when starting a lashing




The Clove Hitch can also be tied using two loops which are passed over the top of a pole

Round Turn and two half hitches





This knot is normally used to secure a rope to a tree or pole as it will not slip under strain. Normally used in boating for tying up a boat to the pier.


Highwayman's Hitch

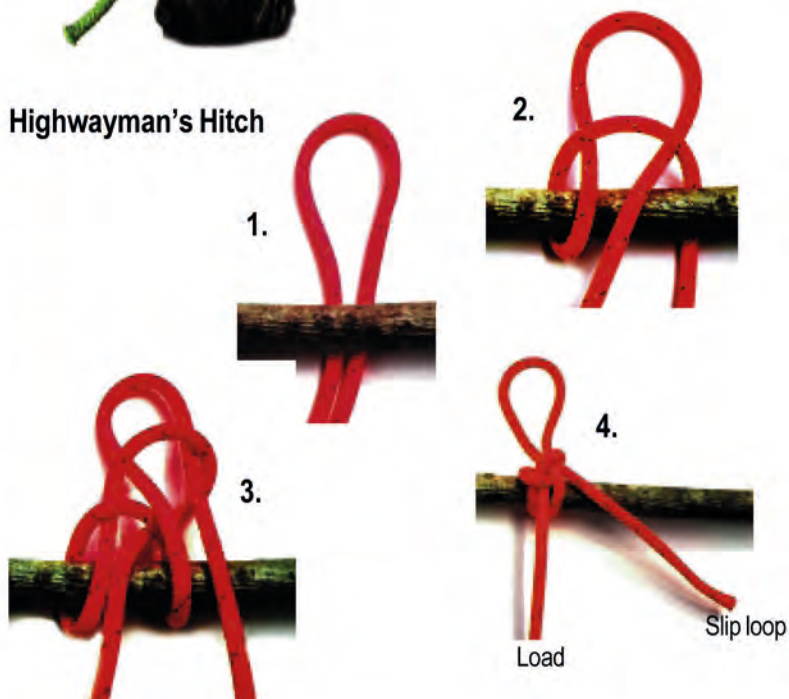

Marline Hitch

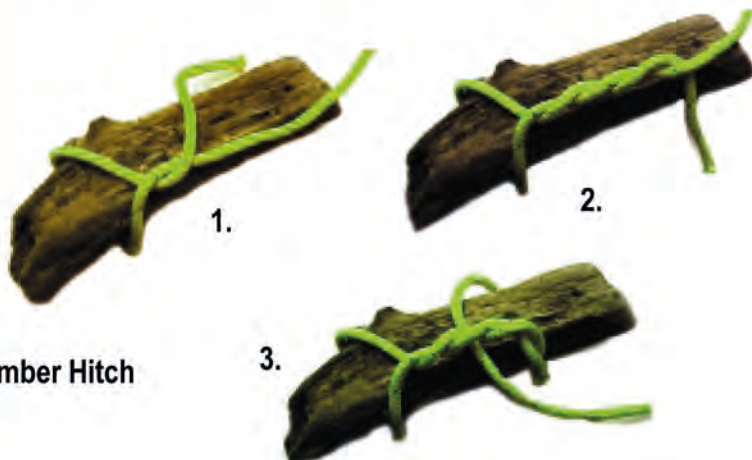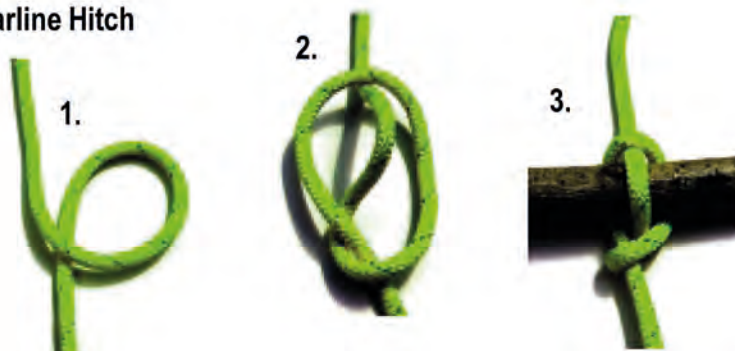

Timber Hitch

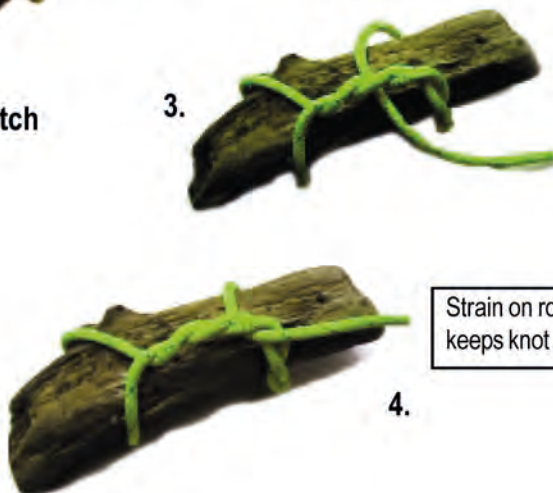

Strain on rope
keeps knot in place


Loop Knots

The Bowline, Figure of eight loop and Manharness Knot are essentially climbing knots. Each knot creates a loop that will not slip under strain. The Bowline is normally used to tie yourself onto the end of a rope. The Figure of eight loop is used to attach a rope to a karabiner however it can also be used to tie yourself on to the end or middle of a rope. The Manharness Knot can do the same job however this knot is normally used to tie on the middle of a rope.

Bowline



Figure of Eight Loop

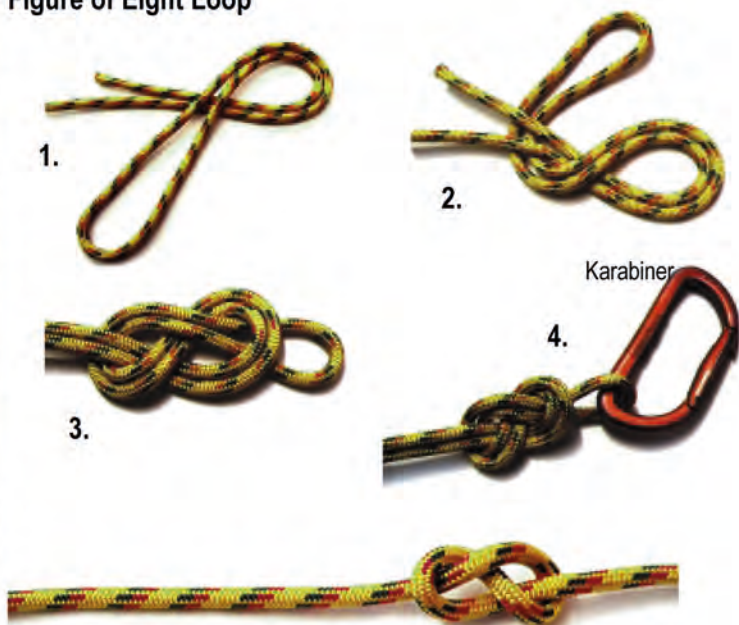

Manharness Hitch



1.



2.



3.

Friction Knots


Two friction knots are illustrated here they are the Pruzzik Knot and the Italian Hitch. Both knots are normally used in climbing and caving. The Pruzzik Knot has the unusual feature, it is non-slip when under pressure and can be slid along a rope when pressure is remove, a useful knot for climbing up a rope. The Italian Hitch is used with a karabiner and allows a person to be lower down a rope under control due to the friction created between the karabiner and the rope.



4.



3.



1.



2.




4.



5.


Italian Hitch

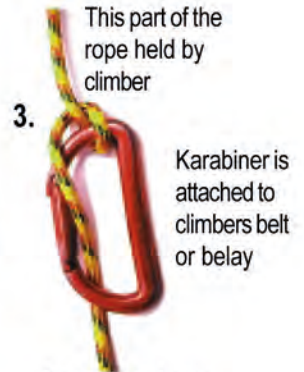

Load or strain on rope

Whipping

In order to prevent a rope from fraying a whipping is applied to the end of a rope. Nylon and plastic ropes are easily prevented from fraying by sealing the end of the rope by melting the fibres using a candle or soldering iron.



Splicing Ropes




Back splice

A back splice is used to prevent a rope from fraying. It is created by unravelling about 120 mm of the rope end. The first step is to make a Crown Knot. Then taking each strand in turn plait it back into the rope. This is done by skipping one lay of the rope and passing the strand under the next. Move to the next strand and repeat this process until all the strands are plaited back into the rope. Place the splice on the ground and roll it under your foot to work in the plait. Tidy up the frayed ends of the splice by burning off ends.



Long splice

A long splice is used to join two ends of a rope. The first step is to unravel about 120mm of the end of each rope. The strands are spread apart and placed together equally as shown. The rope is then plaited as with the back splice - skip one lay and under the next. Tidy up ends by burning.

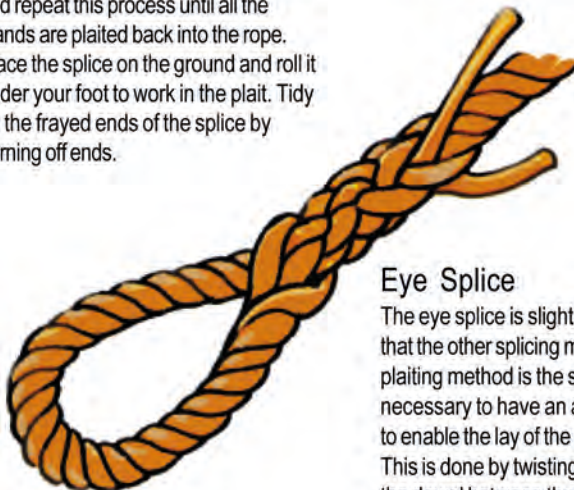

Eye Splice

The eye splice is slightly more complicated than the other splicing methods however the plaiting method is the same. Normally it is necessary to have an awl or pointed dowel to enable the lay of the rope to be opened. This is done by twisting the rope, pushing the dowel between the lay to create a hole so that the plaiting strand can be passed through the lay of the rope.



1. Unravel the end of the rope by about 120mm. Turn the rope to create the loop. Observe the lay of the rope. It will have 3 strands and it is necessary to place a strand under each lay of the rope. Be careful not to get your strands crossed - under the same

lay - otherwise the splice will not plait correctly. When the strands have been placed equally under the 'lays' plait the rope as in the back splice - skip one lay and under the next. Tidy up the ends by burning when finished




Commando rope

The toggle rope came into prominence during the second world war, especially with commandos, who often in the course of their duties had to scale walls, climb cliffs, cross deep streams. Most of the tasks required large quantities of bulky rope to be carried. Rather than burden a few men with such an awkward load,

each soldier was given a piece of rope about 2 metres in length, and 20mm - 25mm in diameter, with an eye splice on one end and a toggle on the other, secured by means of another eye splice. The open eye splice was large enough to allow a toggle to fit through with no danger of the toggle slipping. This is a versatile piece of equipment that every Scout should have. It has many and varied uses on hikes, in pioneering or for emergency measures and life saving.



100mm

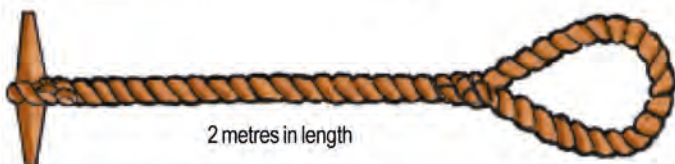


2 metres in length

Lashings

Lashings are knots which use a combination of knots and wrapping to create a binding which holds poles together securely.


Traditional square lashing

This lashing is used for joining poles that cross at right angles. The knot is started using a Clove Hitch. The free end of the rope is then passed around the poles as shown and pulled tightly after each turn. When five or six turns have been made you twist the rope and do a number of frappings between the two poles. The frappings pull the wrappings together and tighten the lashing. Finish with a Clove Hitch.

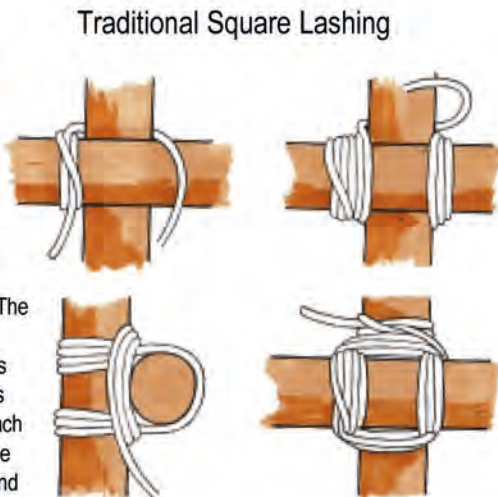


Diagonal Lashing

The diagonal lashing is used to lash together poles which cross each other at an angle. This lashing is started by using a timber hitch. Once secure the wrapping is created as shown. Then the frapping and finishing with a Clove Hitch.

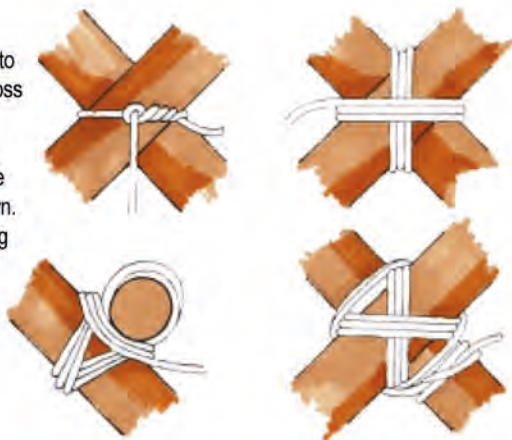


Norwegian Lashing

The Norwegian Lashing is easier to lash and results in a tighter lashing due to the fact that you are tightening the rope against itself. The lashing is created by halving the lashing rope and starting at the middle around the upright pole. Make four wrappings by pulling and changing over the lashing ropes. Then create a number of frappings in a similar fashion and finish the lashing with a Reef Knot

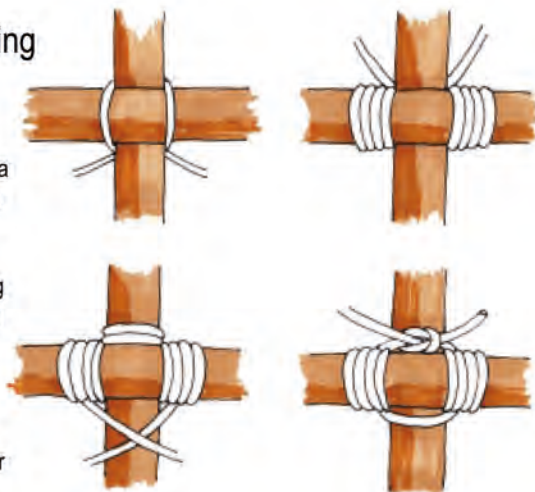


Japanese Lashing

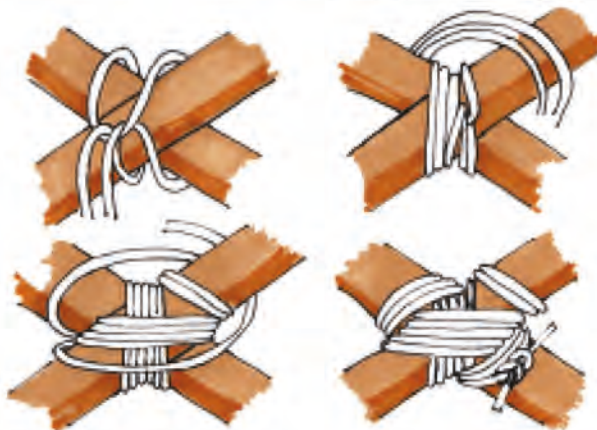

The Japanese Lashing is similar in technique to the Norwegian lashing in that it is used by halving the lashing rope. Start by halving the lashing rope and creating a secure loop around the poles. Using the two strands make the wrappings as shown. Switch the

direction of the wrappings so as to have two single strands working in opposite directions, best done around a pole and frap the lashing. Finish with a Reef Knot

Shear Lashing

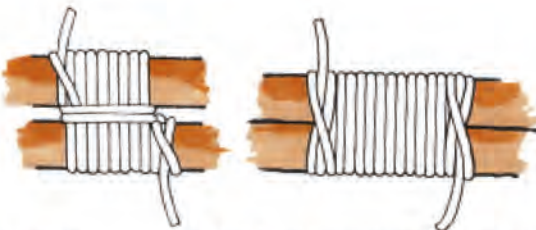


The shear lashing is used to join two poles together to create shear legs when the butt of the poles are spread apart and to create a long pole and keep them parallel. Two lashings are required one at

each end of the overlapping poles. Start with and finish with a Clove Hitch. Wrap and frap as shown. In the case of a shear legs use a frapping whereas in the case of joining two poles do not use a frapping.

Tripod Lashing



Traditional Tripod lashing

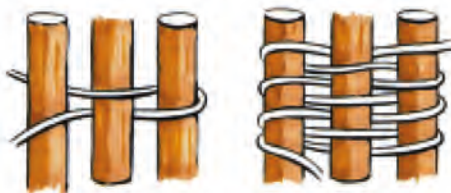


Danish Tripod lashing



Turnique Lashing

The turnique lashing is a quick and easy lashing to create. It is created using a closed loop of rope (heavier than normal lashing rope) placed around the poles. A piece of stick is then placed through the loop and twisted until tight. The stick is then secured to one of the poles with a piece of string

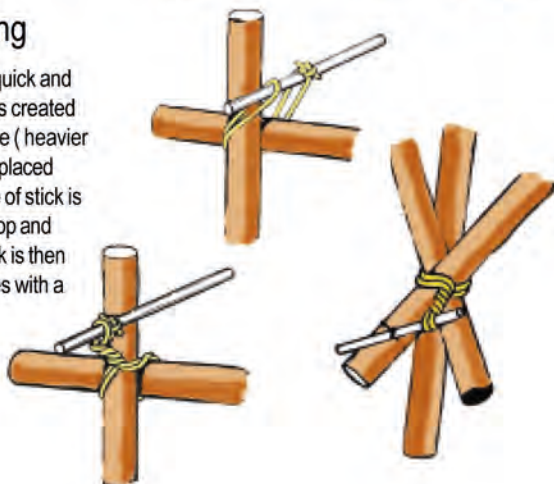

Rope problem - how to place a rope on a branch that cannot be reached



The problem

You need to place a rope on a branch on the opposite side of a ravine or river - how do you get the rope around the branch.

You start by using a lighter rope than the rope you intending using for your bridge or swing. Create a loop in the end of the rope and place a small stick across the loop using the lay of the rope to hold the stick in place.

Next you need some light line or string and attach a hooked stick on the its end. See illustration.

The heavy line is thrown over the branch - or you can use a light line with a weigh on its end first and then draw the heavy line over the branch.

Use the hooked stick attached to a light line and try to pass it through the loop. Once you snag the loop pull the heavy line to you. You now have your line attached to the opposite bank and it will be easy to complete your bridge or swing.

Rope management on rock



Belay

When ever you work with ropes at a height it is necessary to belay yourself to fixed object (rockface, wall) to prevent a fall. A belay is the method that is used to tie yourself to this object. This is done using certified equipment such as tapes, climbing ropes, chocks and metal pegs. A belay should be fixed to at least two points in case one point fails. Setting up a belay correctly requires training and should not be attempted unless you know what you are doing. Your life may depend on it.

Abseiling

Abseiling is a means of lowering yourself from a height using a rope in a controlled manner. It is not a sport in itself but rather a technique used in rock climbing, mountaineering and caving. Specialised training is required and should not be attempted until you know what you are doing. The technique is an important skill to know for emergency situations, in the case of a quick escape in bad weather, to assist people on difficult terrain or in case of an accident.

